

Garage Doors Designed for Life

RESIDENTIAL COLLECTION

Trust Upwardor **Quality Craftsmanship**



For over **45** years, thousands of homeowners every year choose Upwador. We are a leader in manufacturing quality doors that last! Our Dealers are selectively chosen because of their attention to detail and customer service.

Call 1-800-667-3367 to find out more or visit upwardor.com

Telephone 905-876-3667

Fax: 905-876-3533 Email: sales@upwardor.com











Quality Crafted, Uniquely Styled.

Since 1974

Shown:
Al976 Black with
Acid etched glass





The Kanata Collection™

Combines style, durability and environmental friendliness. Polyurethane insulation is foamed in place, which ensures a consistent density and significant panel strength. With a 1-3/4" (44.50mm) thickness, R-value of 16.3, enhanced tongue and groove joint and a true thermal break, the Kanata Collection™ is an excellent choice for those who are looking for a high-quality, energy efficient residential garage door.



Customize Your Look!

Choose your own custom colours to match your home!

Colour Choices





Shown: Flush Black





The Kanata Collection™

Upwardor[®] offers several design and decorative insert options, adding a custom touch to your garage door. Window inserts are interchangeable, providing a classic or decorative look to complement and add value to your home. Frames and inserts are carefully colour-matched and are UV protected.

Features and Options

- High-quality, versatile and eco-friendly
- With a built-in thermal break, this door is suitable for both cold and warm climates
- Multiple glazing window and insert options add value to any home
- Available in six designs: long and short raised panel, long and short carriage house, ribbed panel and flush versions

Visit <u>upwardor.com</u> to explore Panel choices and Window designs

Shown: Trafalgar Black





The Craft Series[™]

Our premium residential offering, represents the ultimate in style, durability and environmental friendliness. The three-section, 1-3/4 thick, taller panel design with an R-value of 16.3 appeals to the discerning homeowner who wants a distinct look without having to make compromises on the quality of their garage door

Features and Options

- 26-gauge, pebble embossed exterior and interior steel back sheet
- Environmentally friendly polyurethane insulation, 100% CFC free
- Built in thermal break prevents cold/heat transfer from the exterior to the interior of the door

Visit <u>upwardor.com</u> to explore Panel choices and Window designs

Shown: Denison White





The Craft Series™

Represents the ultimate in style, durability and environmental friendliness. Our new three section taller panel design offers a truly distinct look while maintaining the quality and performance you would expect from a premium door, ideal for the homeowner who is looking for more than just curb appeal.



Customize Your Look!

Choose your own custom colours to match your home!

Colour Choices







WHITE

SANDTONE

WALNUT (28" ONLY)

Actual door colour will vary from colour renditions.

Shown: Granville Walnut





AL-976[™]

Is our Most Popular Aluminum Door, Manufactured since 1976, offers a variety of options where superior strength, maximum visibility and exceptional light transmission are required. Its unique and durable design allows customized configurations for openings up to 24' (7.32m) wide. This modern look can add class to any home

Features and Options

- 1-3/4" (44.50mm) thickness
- Clear anodized finish standard
- Tongue and groove section with weather seal inhibits air infiltration.
- Available with various glazing options: single, insulated, tinted, tempered or specialty

Visit <u>upwardor.com</u> to explore Panel choices and Window designs

Customize Your Look!



Choose your own custom colours to match your home!

5 Year

Limited warranty on door finish

1 Year

Limited warranty workmanship and materials



Solalite[™]

Ultra modern design, The Solalite[™] door is an exceptional example of innovation and engineering. This door is impact, corrosion and moisture-resistant. The Solalite's sleek and contemporary appearance blends with current architectural trends. A door sure to stand out on your block!

Features and Options

- Manufactured from 2" thick (50.8mm) corrosion-resistant aluminum extrusions.
- Standard clear anodized finish.
- Polycarbonate, translucent glazing is lightweight, virtually unbreakable and energy efficient.
- Continuous hinge design inhibits water build-up between sections and prevents air infiltration, which maximizes thermal resistance.





Choose your own custom colors to match your home!

Visit **upwardor.com** to explore Panel choices and Window designs.



Smooth Residential Door

Polyurethane insulation is foamed in place, which ensures a consistent density and significant panel strength. With a 44.5 mm (1-3/4") thickness, R-value of 16.3. Completely Smooth 20 ga face and our new tongue and groove design with a true thermal break.



- High-quality, versatile and eco-friendly
- With a built-in thermal break, this door is suitable for both cold and warm climates
- Multiple glazing window and insert options add value to any home.
- Available in Smooth Flush

Colour **Choices**





Black

White



Customize Your Look!

Choose your own custom colours to match your home!





Smooth Residential Door

Polyurethane insulation is foamed in place, which ensures a consistent density and significant panel strength. With a 50.8 mm (2") thickness, R-value of 18.4. Completely Smooth 20 ga face and our new tongue and groove design with a true thermal break.

Key Benefits:

- High-quality, versatile and eco-friendly
- With a built-in thermal break, this door is suitable for both cold and warm climates
- Multiple glazing window and insert options add value to any home.
- Available in Smooth Flush

Colour Choices







Customize Your Look!

Choose your own custom colours to match your home!


Measurements & Specifications

KANATA COLLECTION

Product Selection Guide & Specifications

EXTERIOR/INTERIOR STEEL BACKSHEET	26-GAUGE, PEBBLE EMBOSSED
HORIZONTAL REINFORCEMENT STRIP	25-GAUGE (2 PER PANEL)
END STILES – WHITE GALVANIZED	20-GAUGE
MAXIMUM STANDARD WIDTH	18'0" (5.49m)
MAXIMUM STANDARD HEIGHT	3" (76mm) INCREMENTS
SECTION HEIGHT	18", 21", & 24" (457, 533 & 610mm)
WARRANTY	LIMITED LIFETIME SEE WARRANTY SHEET
STANDARD RADIUS	15" (12" AVAILABLE UPON REQUEST)


Side view illustration

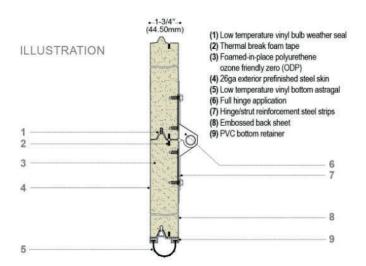

KANATA COLLECTION


Stamp Designs








WindowDesigns/Inserts

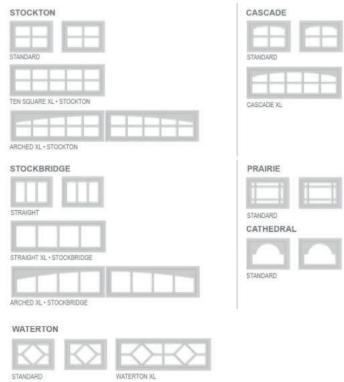

Product Selection Guide & Specifications


THICKNESS/PRODUCT TYPE	1-3/4" (44.50mm)
EXTERIOR/INTERIOR STEEL BACKSHEET	26-GAUGE, PEBBLE EMBOSSED
INSULATION TYPE/ FOAM PROCESS	ZERO ODP POLYURETHANE/ CONTINUOUS
R-VALUE/U-VALUE	16.3/0.06
SECTION JOINT	TONGUE & GROOVE
HORIZONTAL REINFORCEMENT STRIP	25-GAUGE (2 PER PANEL)
END STILES – WHITE GALVANIZED	20-GAUGE
AVAILABLE WIDTHS	8',9',12', & 16'
MAXIMUM HEIGHT	8' & 7'
SECTION HEIGHT	28" & 32" (711 & 813mm)
WARRANTY	LIMITED LIFETIME SEE WARRANTY SHEET
HARDWARE WARRANTY	1-YEAR
STANDARD RADIUS	20"
CLEARANCE AT HEADER	23" MIN

Side view illustration

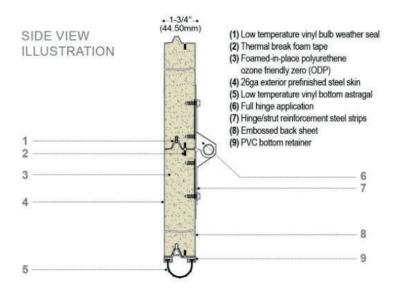


CRAFT SERIES

Panel Choices

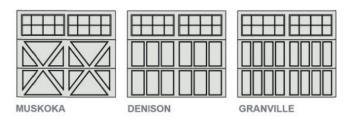

Visit **upwardor.com** to explore Panel choices and Window designs


Window Inserts

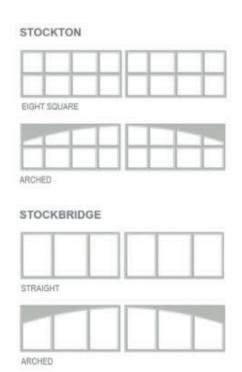

Measurements & Specifications

ALUMINUM DOORS

Cross Section

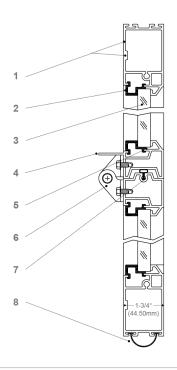




- (1) .070" (1.78mm) typical, .115" (2.92mm) at attachments
 (2) Glazing molding

- (4) Reinforcing strut (optional under 16' [4.88m])
- (5) Soft vinyl glazing bead
- (6) Center hinge (7) Weather seal
- (8) Low temp. vinyl astragal

Visit upwardor.com to explore Panel choices and Window designs

SOLALITE

Cross Section

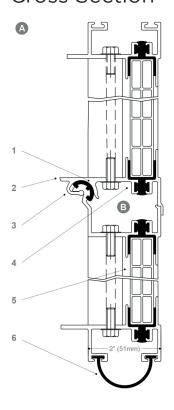






- (1) PVC bushing
- (2) Built-in integral strut
- (3) Continuous hinge extrusion
 (4) Thermally broken frame (optional)
- (5) 5/8" (16mm) five wall polycarbonate clear, light bronze or dark bronze

(6) Low temperature vinyl bottom astragal

Visit upwardor.com to explore Panel choices and Window designs



For more product information visit: **upwardor.com**

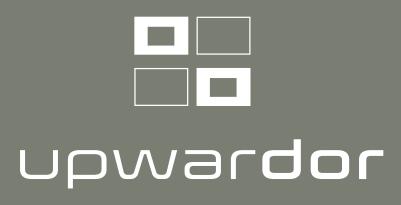

Garage Doors Designed for Life

1-800-667-3367

Telephone 905-876-3667

Fax: 905-876-3533

Email: sales@upwardor.com